



H I G H S P E C • H I G H V A L U E • H I G H S T A N D A R D S

TM12

TELESCOPIC MAST

SELF-PROPELLED LIFT

- 5.8m maximum working height
- Drives through standard doorways with operator in platform
- 227kg platform capacity for two people plus tools
- Simple one hand proportional joystick control
- Transportable in most passenger elevators
- Non-marking tyres protect floor finishes
- Quick access to service components
- Five year structural warranty
- CE approved

UpRight

S P E C I F I C A T I O N


TM12

PLATFORM CAPACITY (max.)	227kg
PLATFORM SIZE (inside)	0.74m x 1.04m
WEIGHT	630kg
WORKING HEIGHT A	5.8m
PLATFORM HEIGHT B	3.8m
MAX. DRIVE HEIGHT	3.8m
STOWED HEIGHT C	1.64m
LENGTH D	1.36m
WIDTH E	0.76m
DRIVE SPEED - (max.)	3.65 km/h
- with platform raised	0.87 km/h
GRADEABILITY	25%
INSIDE TURNING RADIUS	0.37m
GROUND CLEARANCE	76mm
LIFT SPEED - raise/lower	20 sec./23 sec
TOE BOARDS	152mm
CONTROL SYSTEM	Proportional joystick type
DRIVE SYSTEM	Dual front wheel hydraulic motors
POWER SOURCE	24V 4HP DC electric motor 4-220 AH batteries
BATTERY CHARGER	25 amp automatic
PARKING BRAKE	2 wheel, spring-applied hydraulic release with manual override

STANDARD FEATURES

- Only 0.76m wide and 1.36m long
- Proportional one hand joystick controls
- Non marking tyres
- Automatic low drive speed when elevated
- 24V DC 4HP electric motor for clean, pollution-free power indoors
- Descent, tilt and platform overload alarms
- High amp hour rating gives long service between services
- 25 amp on-board battery charger
- Hour meter/battery level indicator
- Emergency lowering at ground level

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operator's manual for detailed instructions on the proper use and maintenance of this equipment. UpRight also manufacture a complete line of scaffolding and other aerial work platforms. Contact your UpRight distributor for information on other products.

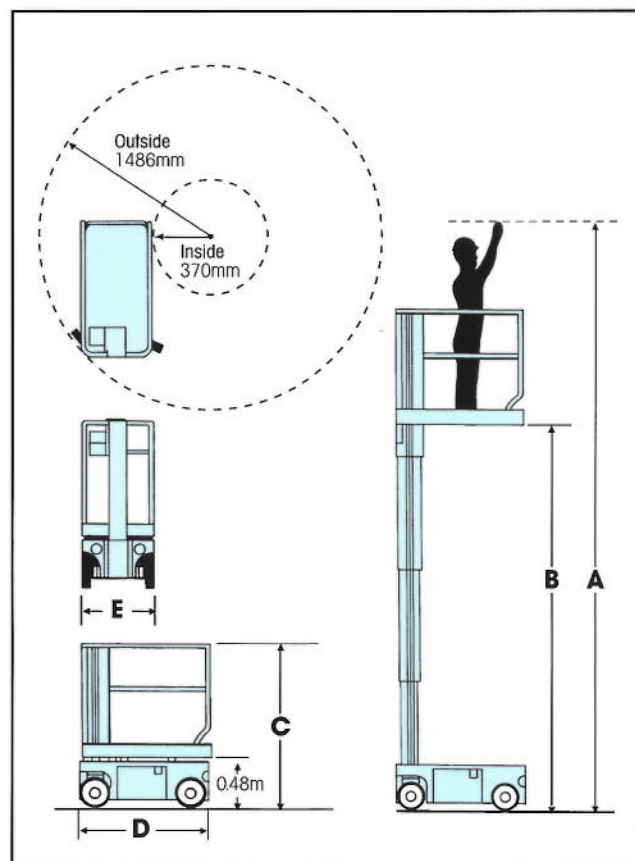

The UpRight TM12 provides a safe, efficient means of working at height in restricted spaces typically encountered in offices, retail stores, hotels, public buildings or crowded industrial aisles.

Its compact size also makes it ideal for applications such as stock picking and record storage retrieval. Operators simply step onto the platform, drive to the work location and elevate to the desired height. When the job is complete, the lift can be quickly lowered and returned to a convenient storage area.



Low stowed height allows TM12 to drive through doorways with operator in platform.

CE This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

MANUFACTURED BY
UpRight

UpRight

Pottery Road, Dun Laoire, Ireland.
Tel: +353 1 202 4100
Fax: +353 1 202 4101
Internet: <http://www.uprighteuro.com>